


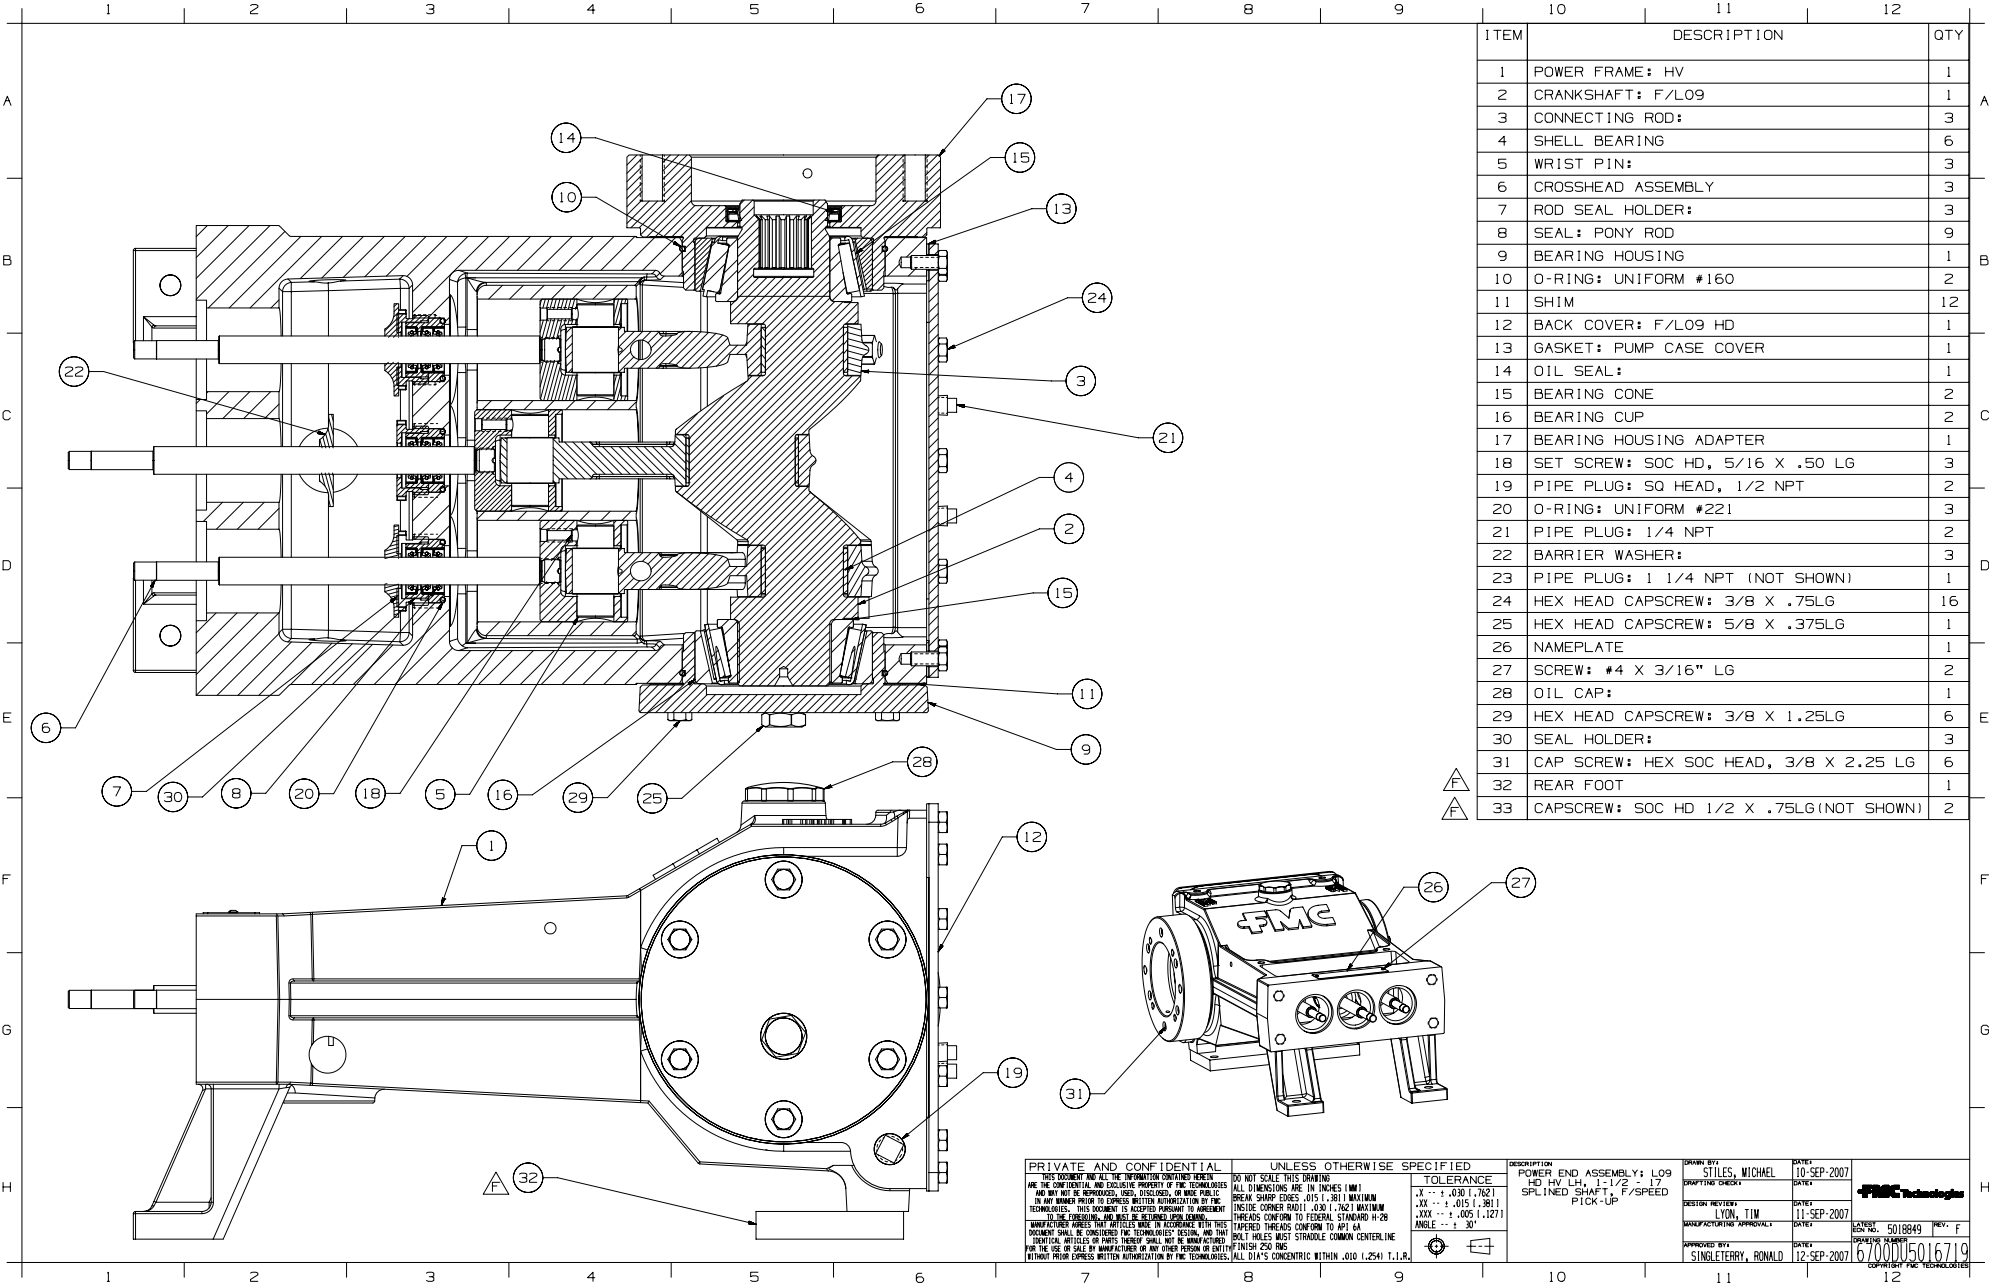

ITEM	DESCRIPTION	QTY
1	POWER FRAME: HV	1
2	CRANKSHAFT: F/L09	1
3	CONNECTING ROD:	3
4	SHELL BEARING	6
5	WRIST PIN:	3
6	CROSSHEAD ASSEMBLY	3
7	ROD SEAL HOLDER:	3
8	SEAL: PONY ROD	9
9	BEARING HOUSING	1
10	O-RING: UNIFORM #160	2
11	SHIM	12
12	BACK COVER: F/L09 HD	1
13	GASKET: PUMP CASE COVER	1
14	OIL SEAL:	1
15	BEARING CONE	2
16	BEARING CUP	2
17	BEARING HOUSING ADAPTER	1
18	SET SCREW: SOC HD, 5/16 X .50 LG	3
19	PIPE PLUG: SQ HEAD, 1/2 NPT	2
20	O-RING: UNIFORM #221	3
21	PIPE PLUG: 1/4 NPT	2
22	BARRIER WASHER:	3
23	PIPE PLUG: 1 1/4 NPT (NOT SHOWN)	1
24	HEX HEAD CAPSCREW: 3/8 X .75LG	16
25	HEX HEAD CAPSCREW: 5/8 X .375LG	1
26	NAMEPLATE	1
27	SCREW: #4 X 3/16" LG	2
28	OIL CAP:	1
29	HEX HEAD CAPSCREW: 3/8 X 1.25LG	6
30	SEAL HOLDER:	3
31	CAP SCREW: HEX SOC HEAD, 3/8 X 2.25 LG	6
32	REAR FOOT	1
33	CAPSCREW: SOC HD 1/2 X .75LG (NOT SHOWN)	2

PRIVATE AND CONFIDENTIAL THIS DOCUMENT AND ALL THE INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL AND EXCLUSIVE PROPERTY OF THE TECHNOLOGIES AND MAY NOT BE REPRODUCED, USED, DISCLOSED, OR MADE PUBLIC IN ANY MANNER WITHOUT THE WRITTEN AUTHORIZATION OF THE TECHNOLOGIES. THIS DOCUMENT IS ACCEPTED PURSUANT TO AN AGREEMENT TO THE TECHNOLOGIES AND WILL BE RETURNED UPON DEMAND. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES (MM) UNLESS OTHERWISE SPECIFIED. THIS DOCUMENT SHALL BE CONSIDERED THE TECHNOLOGIES' DESIGN, AND THAT ANY DIMENSIONS, MATERIALS, OR PARTS NUMBER SHALL NOT BE MANUFACTURED FOR THE USE OF SALE BY MANUFACTURER OR ANY OTHER PERSON OR ENTITY WITHOUT PRIOR WRITTEN AUTHORIZATION BY THE TECHNOLOGIES. ALL DIA'S CONCENTRIC WITHIN .010 (1.254) T.I.R.	UNLESS OTHERWISE SPECIFIED TOLERANCE .X . . . +.000 / -.001 .XX . . . +.015 / -.011 .XXX . . . +.005 / -.021 ANGLE . . . 30°	DESCRIPTION POWER END ASSEMBLY: L09 HD HV LH, 1-1/2" x 17" SPLINED SHAFT, F/SPEED PICK-UP	DESIGNED BY STILES, MICHAEL DRAWING CHECKED DATE 10-SEP-2007	FMC Technologies REV. NO. 5018649 670005016719 COPYRIGHT FMC TECHNOLOGIES
	DESIGN REVIEWED LYON, TIM MANUFACTURING APPROVAL DATE 11-SEP-2007	INSPECTED BY SINGLETERY, RONALD DATE 12-SEP-2007		