



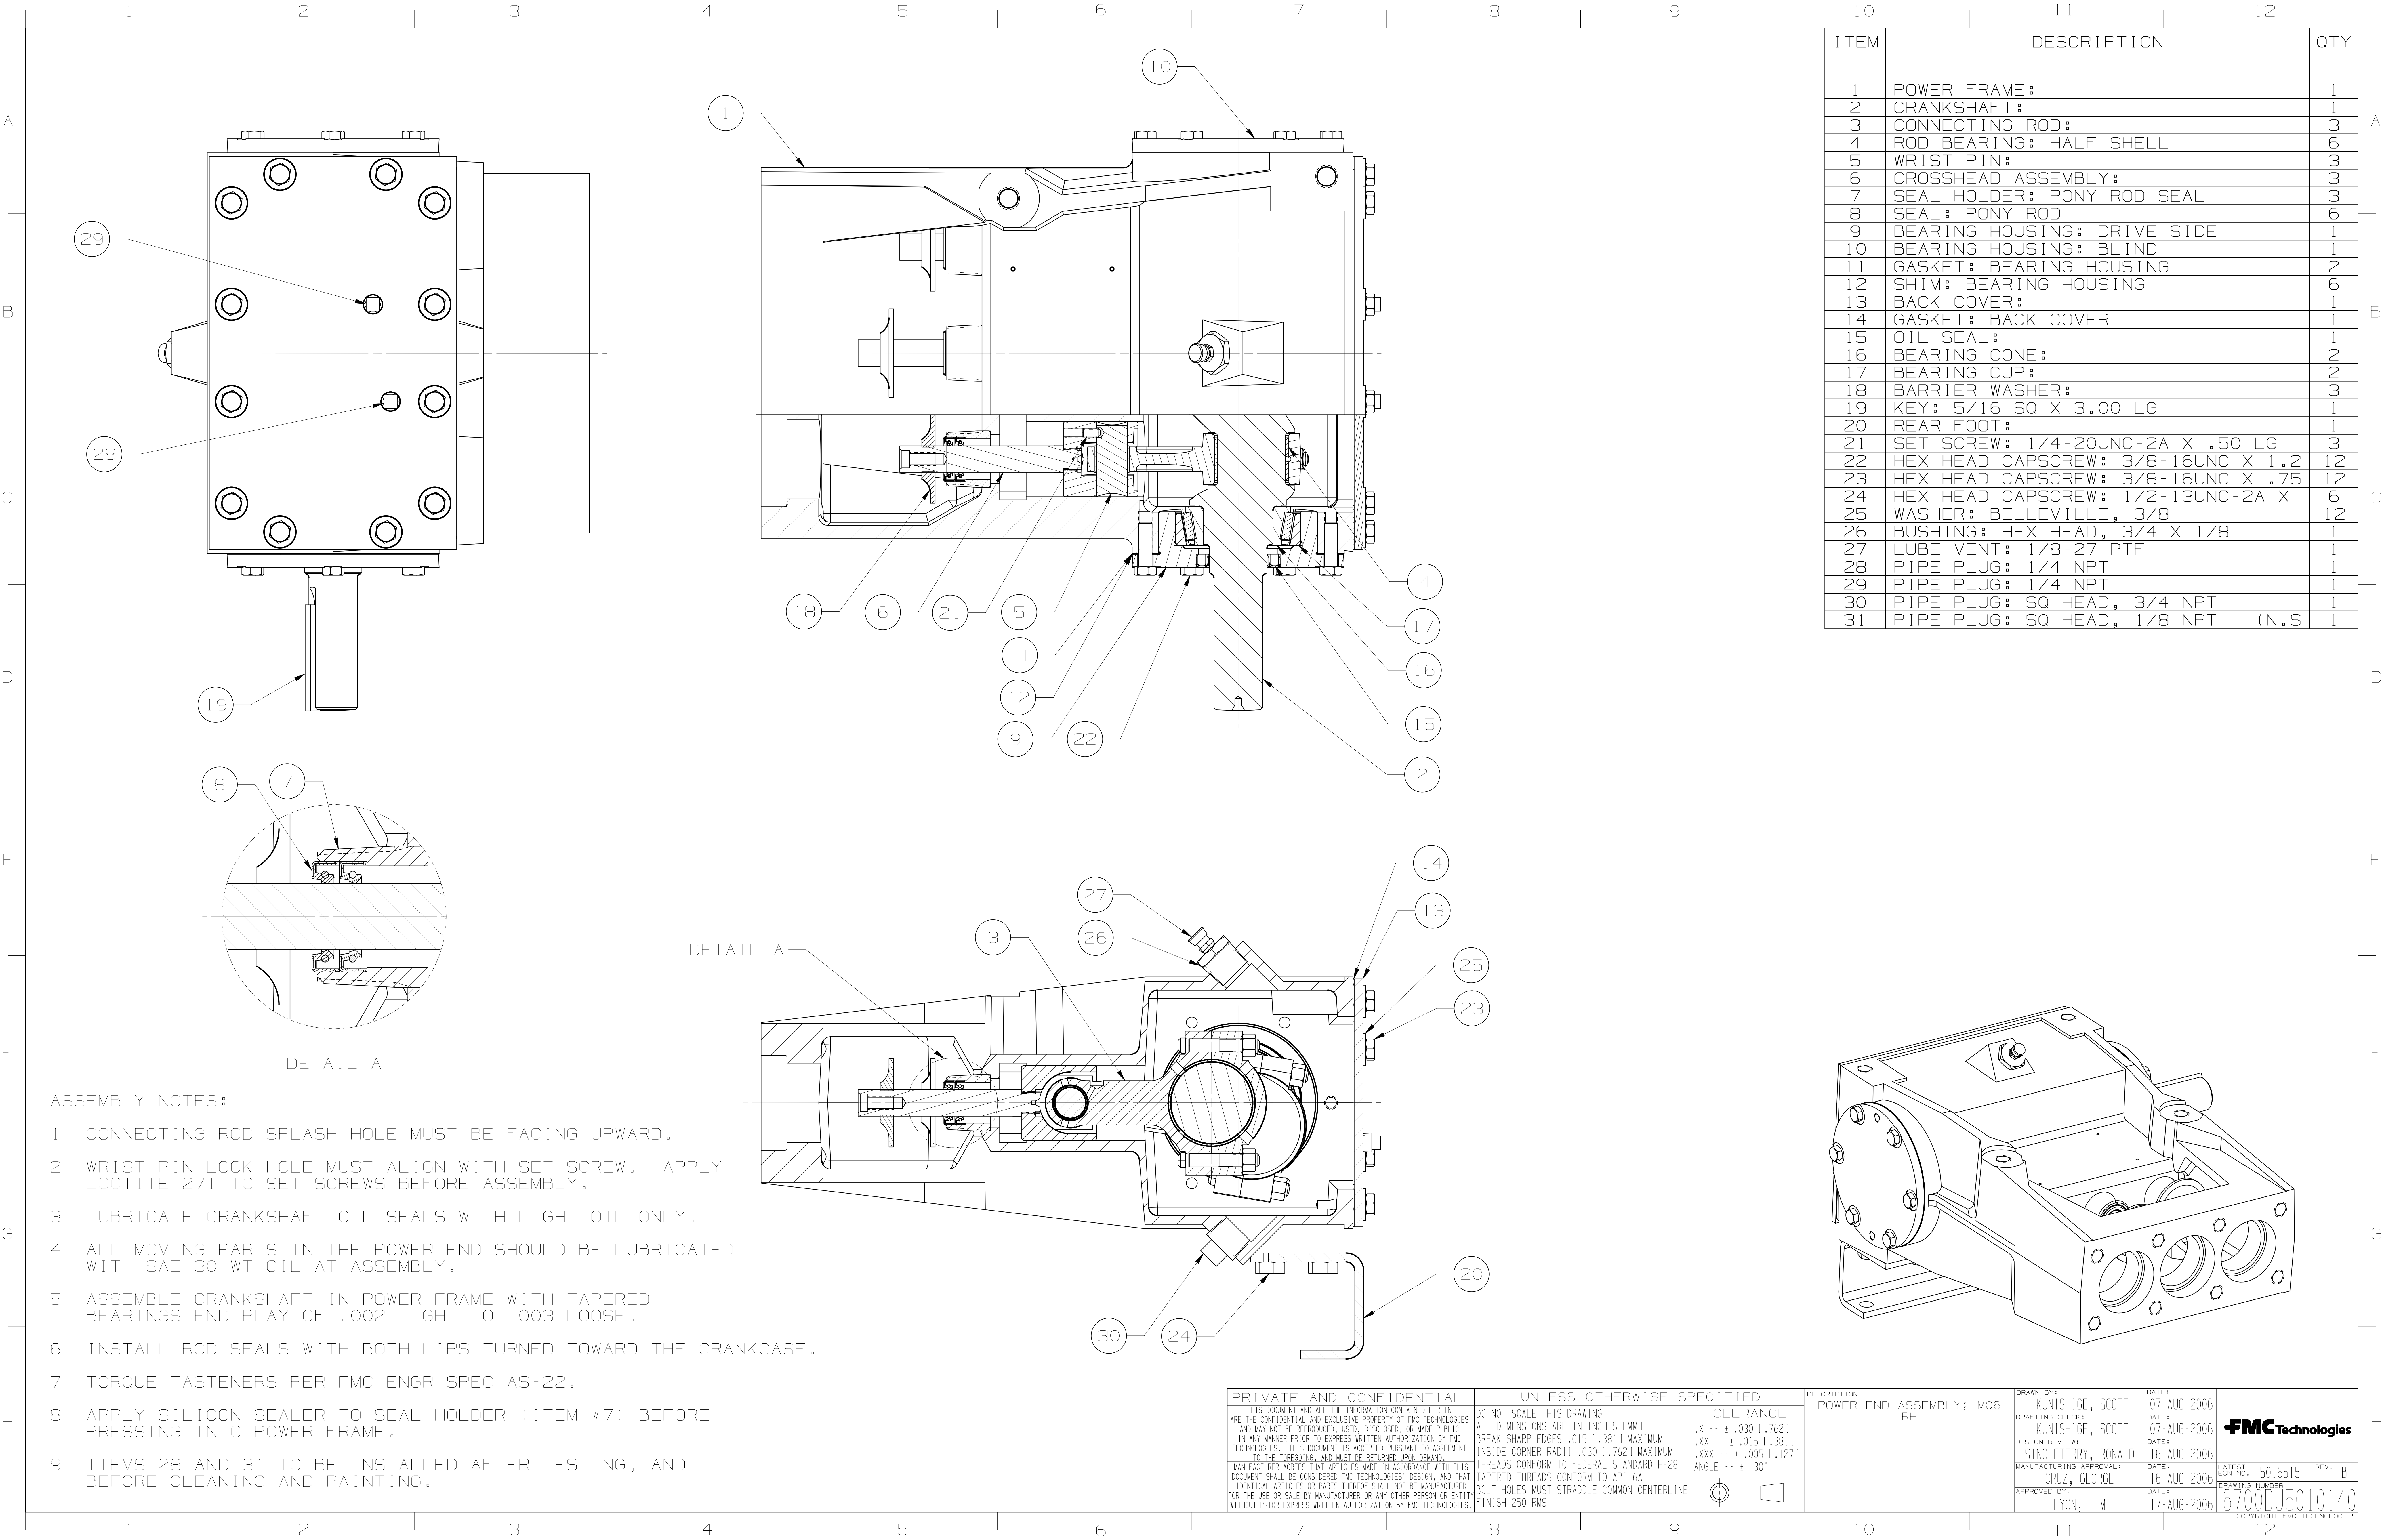


ITEM	DESCRIPTION	QTY
1	POWER FRAME:	1
2	CRANKSHAFT:	1
3	CONNECTING ROD:	3
4	ROD BEARING: HALF SHELL	6
5	WRIST PIN:	3
6	CROSSHEAD ASSEMBLY:	3
7	SEAL HOLDER: PONY ROD SEAL	3
8	SEAL: PONY ROD	6
9	BEARING HOUSING: DRIVE SIDE	1
10	BEARING HOUSING: BLIND	1
11	GASKET: BEARING HOUSING	2
12	SHIM: BEARING HOUSING	6
13	BACK COVER:	1
14	GASKET: BACK COVER	1
15	OIL SEAL:	1
16	BEARING CONE:	2
17	BEARING CUP:	2
18	BARRIER WASHER:	3
19	KEY: 5/16 SQ X 3.00 LG	1
20	REAR FOOT:	1
21	SET SCREW: 1/4-20UNC-2A X .50 LG	3
22	HEX HEAD CAPSCREW: 3/8-16UNC X 1.2	12
23	HEX HEAD CAPSCREW: 3/8-16UNC X .75	12
24	HEX HEAD CAPSCREW: 1/2-13UNC-2A X	6
25	WASHER: BELLEVILLE, 3/8	12
26	BUSHING: HEX HEAD, 3/4 X 1/8	1
27	LUBE VENT: 1/8-27 PTF	1
28	PIPE PLUG: 1/4 NPT	1
29	PIPE PLUG: 1/4 NPT	1
30	PIPE PLUG: SQ HEAD, 3/4 NPT	1
31	PIPE PLUG: SQ HEAD, 1/8 NPT (N.S)	1

ASSEMBLY NOTES:

- CONNECTING ROD SPLASH HOLE MUST BE FACING UPWARD.
- WRIST PIN LOCK HOLE MUST ALIGN WITH SET SCREW. APPLY LOCTITE 271 TO SET SCREWS BEFORE ASSEMBLY.
- LUBRICATE CRANKSHAFT OIL SEALS WITH LIGHT OIL ONLY.
- ALL MOVING PARTS IN THE POWER END SHOULD BE LUBRICATED WITH SAE 30 WT OIL AT ASSEMBLY.
- ASSEMBLE CRANKSHAFT IN POWER FRAME WITH TAPERED BEARINGS END PLAY OF .002 TIGHT TO .003 LOOSE.
- INSTALL ROD SEALS WITH BOTH LIPS TURNED TOWARD THE CRANKCASE.
- TORQUE FASTENERS PER FMC ENGR SPEC AS-22.
- APPLY SILICON SEALER TO SEAL HOLDER (ITEM #7) BEFORE PRESSING INTO POWER FRAME.
- ITEMS 28 AND 31 TO BE INSTALLED AFTER TESTING, AND BEFORE CLEANING AND PAINTING.

PRIVATE AND CONFIDENTIAL		UNLESS OTHERWISE SPECIFIED		DESCRIPTION	DRAWN BY:		DATE:
THIS DOCUMENT AND ALL THE INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL AND EXCLUSIVE PROPERTY OF FMC TECHNOLOGIES AND MAY NOT BE REPRODUCED, USED, DISCLOSED, OR MADE PUBLIC IN ANY MANNER PRIOR TO EXPRESS WRITTEN AUTHORIZATION BY FMC TECHNOLOGIES. THIS DOCUMENT IS ACCEPTED PURSUANT TO AGREEMENT TO THE FOREGOING, AND MUST BE RETURNED UPON DEMAND. MANUFACTURER AGREES THAT ARTICLES MADE IN ACCORDANCE WITH THIS DOCUMENT SHALL BE CONSIDERED FMC TECHNOLOGIES' DESIGN, AND THAT IDENTICAL ARTICLES OR PARTS THEREOF SHALL NOT BE MANUFACTURED FOR THE USE OR SALE BY MANUFACTURER OR ANY OTHER PERSON OR ENTITY WITHOUT PRIOR EXPRESS WRITTEN AUTHORIZATION BY FMC TECHNOLOGIES.		DO NOT SCALE THIS DRAWING ALL DIMENSIONS ARE IN INCHES (MM) BREAK SHARP EDGES .015 (.381) MAXIMUM INSIDE CORNER RAD11 .030 (.762) MAXIMUM THREADS CONFORM TO FEDERAL STANDARD H-28 TAPERED THREADS CONFORM TO API 6A BOLT HOLES MUST STRADDLE COMMON CENTERLINE FINISH 250 RMS		POWER END ASSEMBLY: M06 RH	KUNISHIGE, SCOTT	07-AUG-2006	
				TOLERANCE		FMC Technologies	
				.X -- ± .030 (.762) .XX -- ± .015 (.381) .XXX -- ± .005 (.127) ANGLE -- ± 30'		DATE:	
						DATE:	
					CRUZ, GEORGE	16-AUG-2006	
					APPROVED BY:	DATE:	
					LYON, TIM	17-AUG-2006	
						LATEST REV. NO. 5016515	REV. B
						DRAWING NUMBER	6700DU5010140

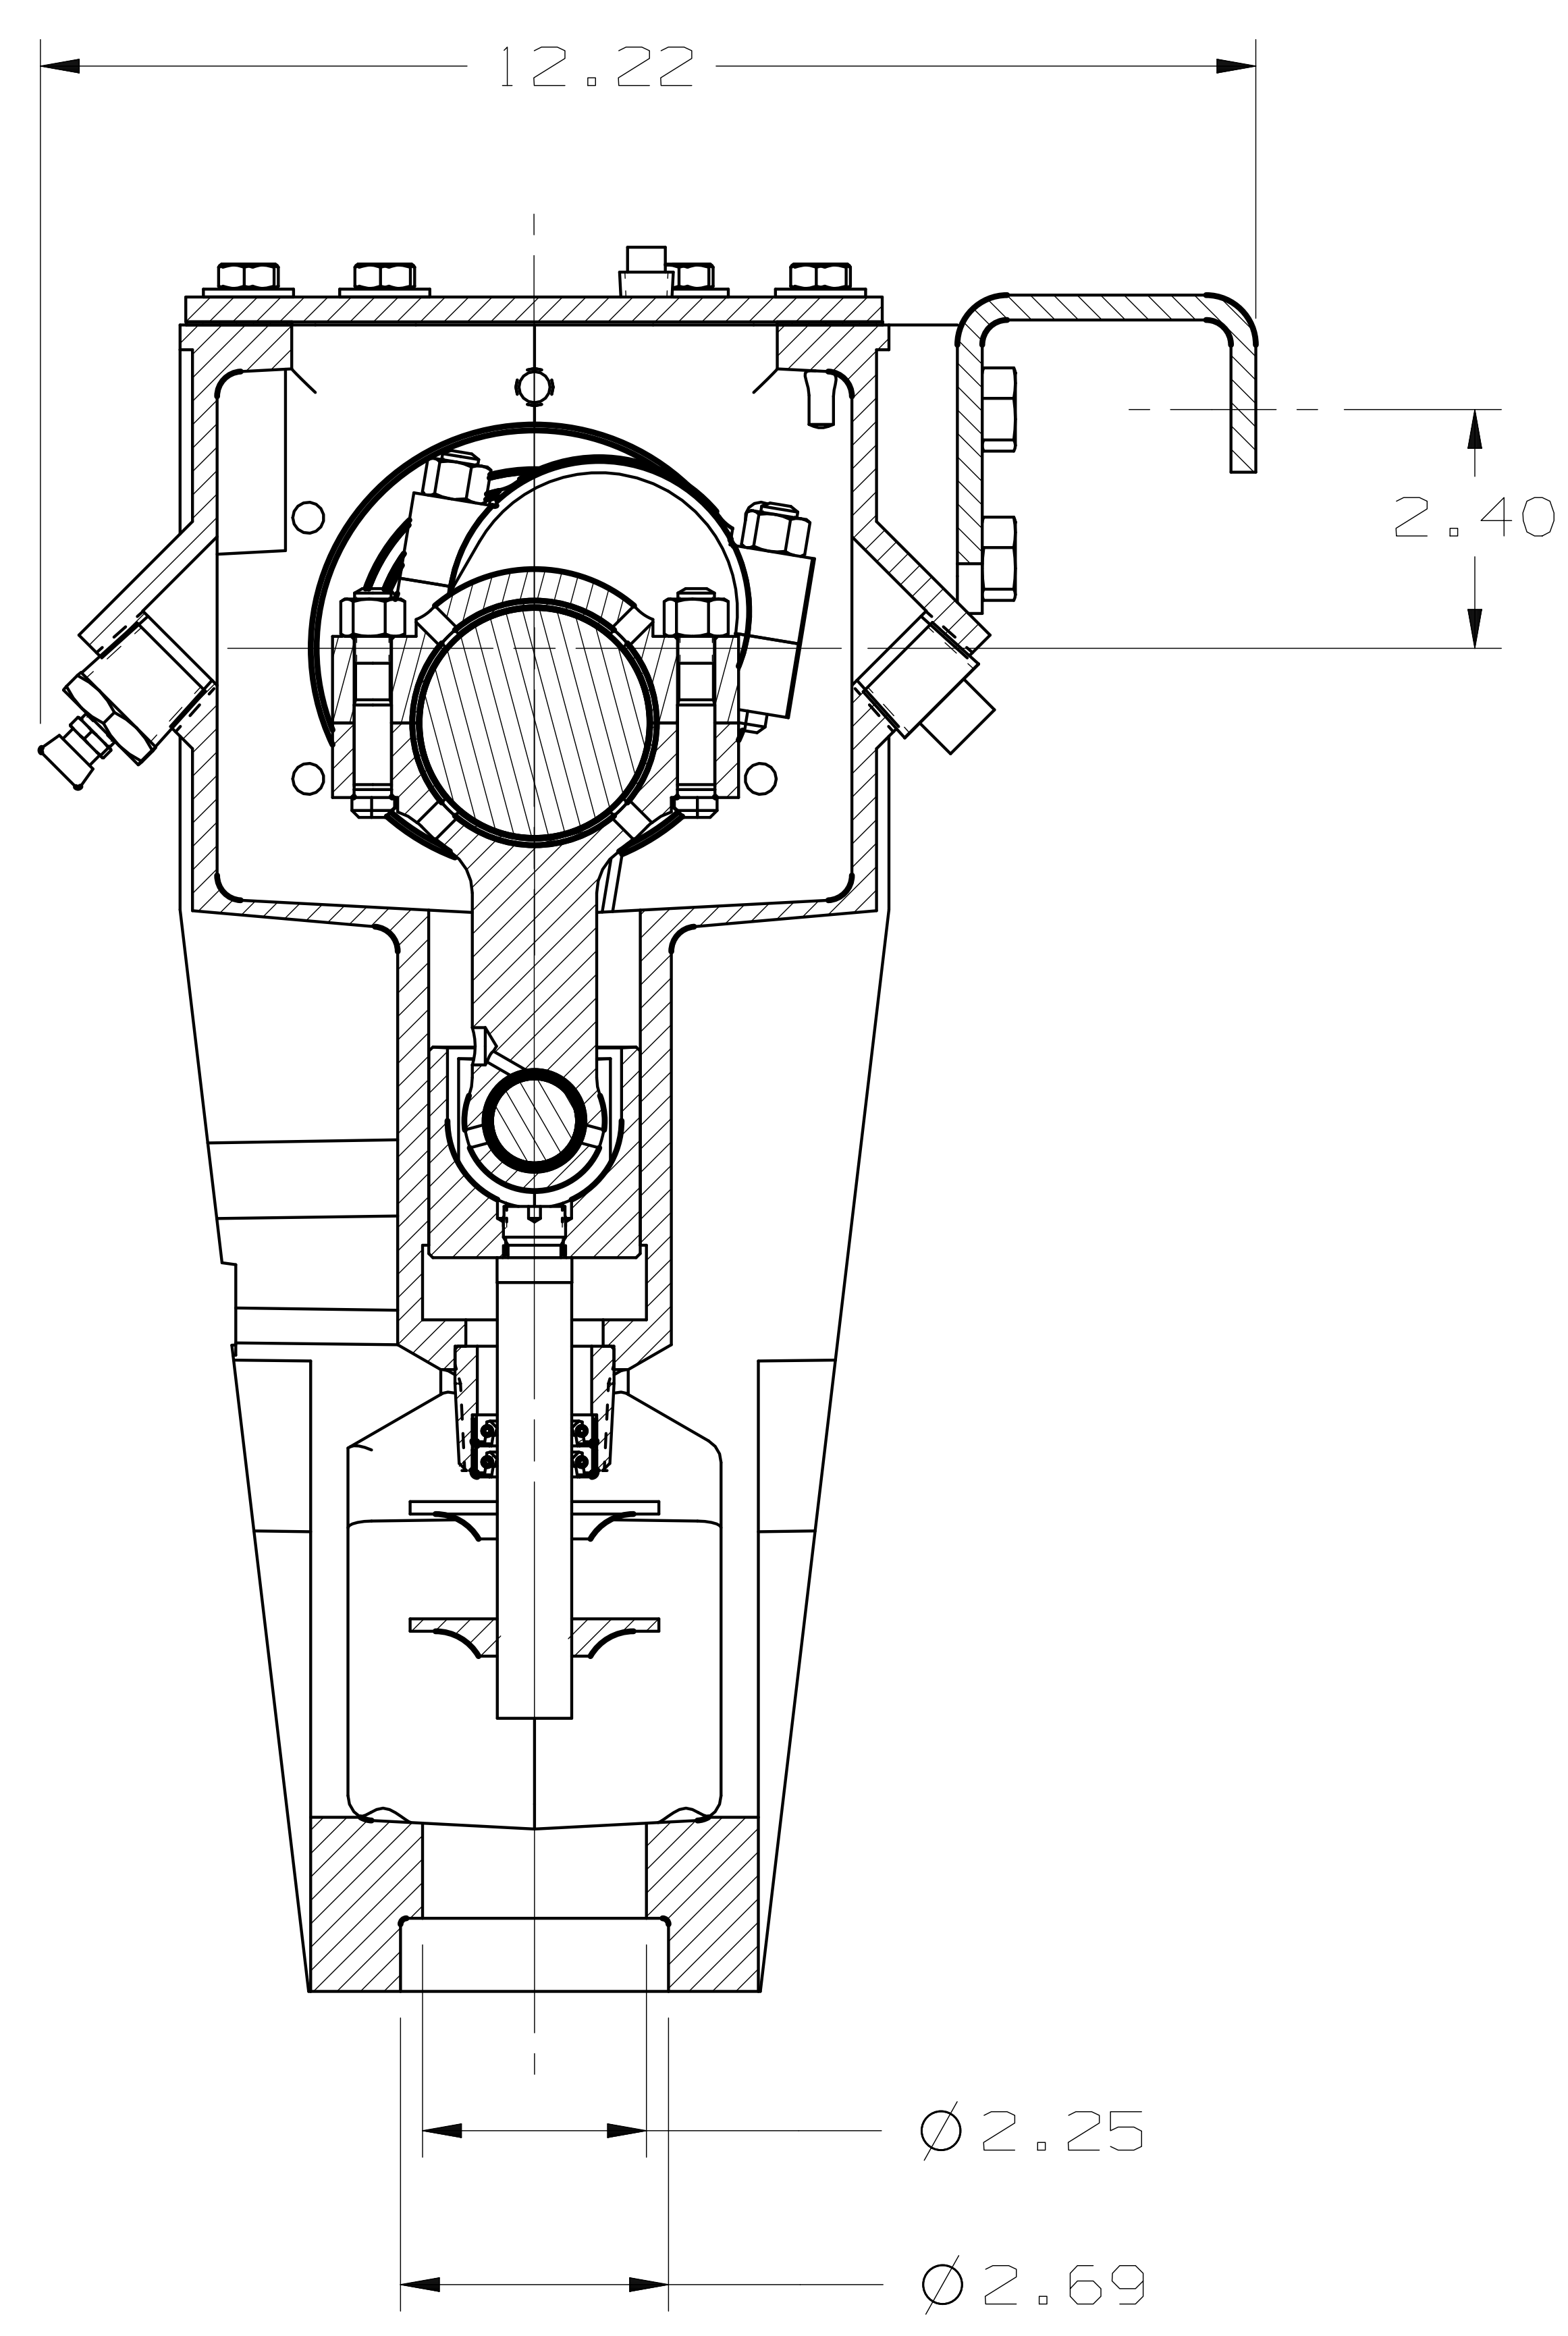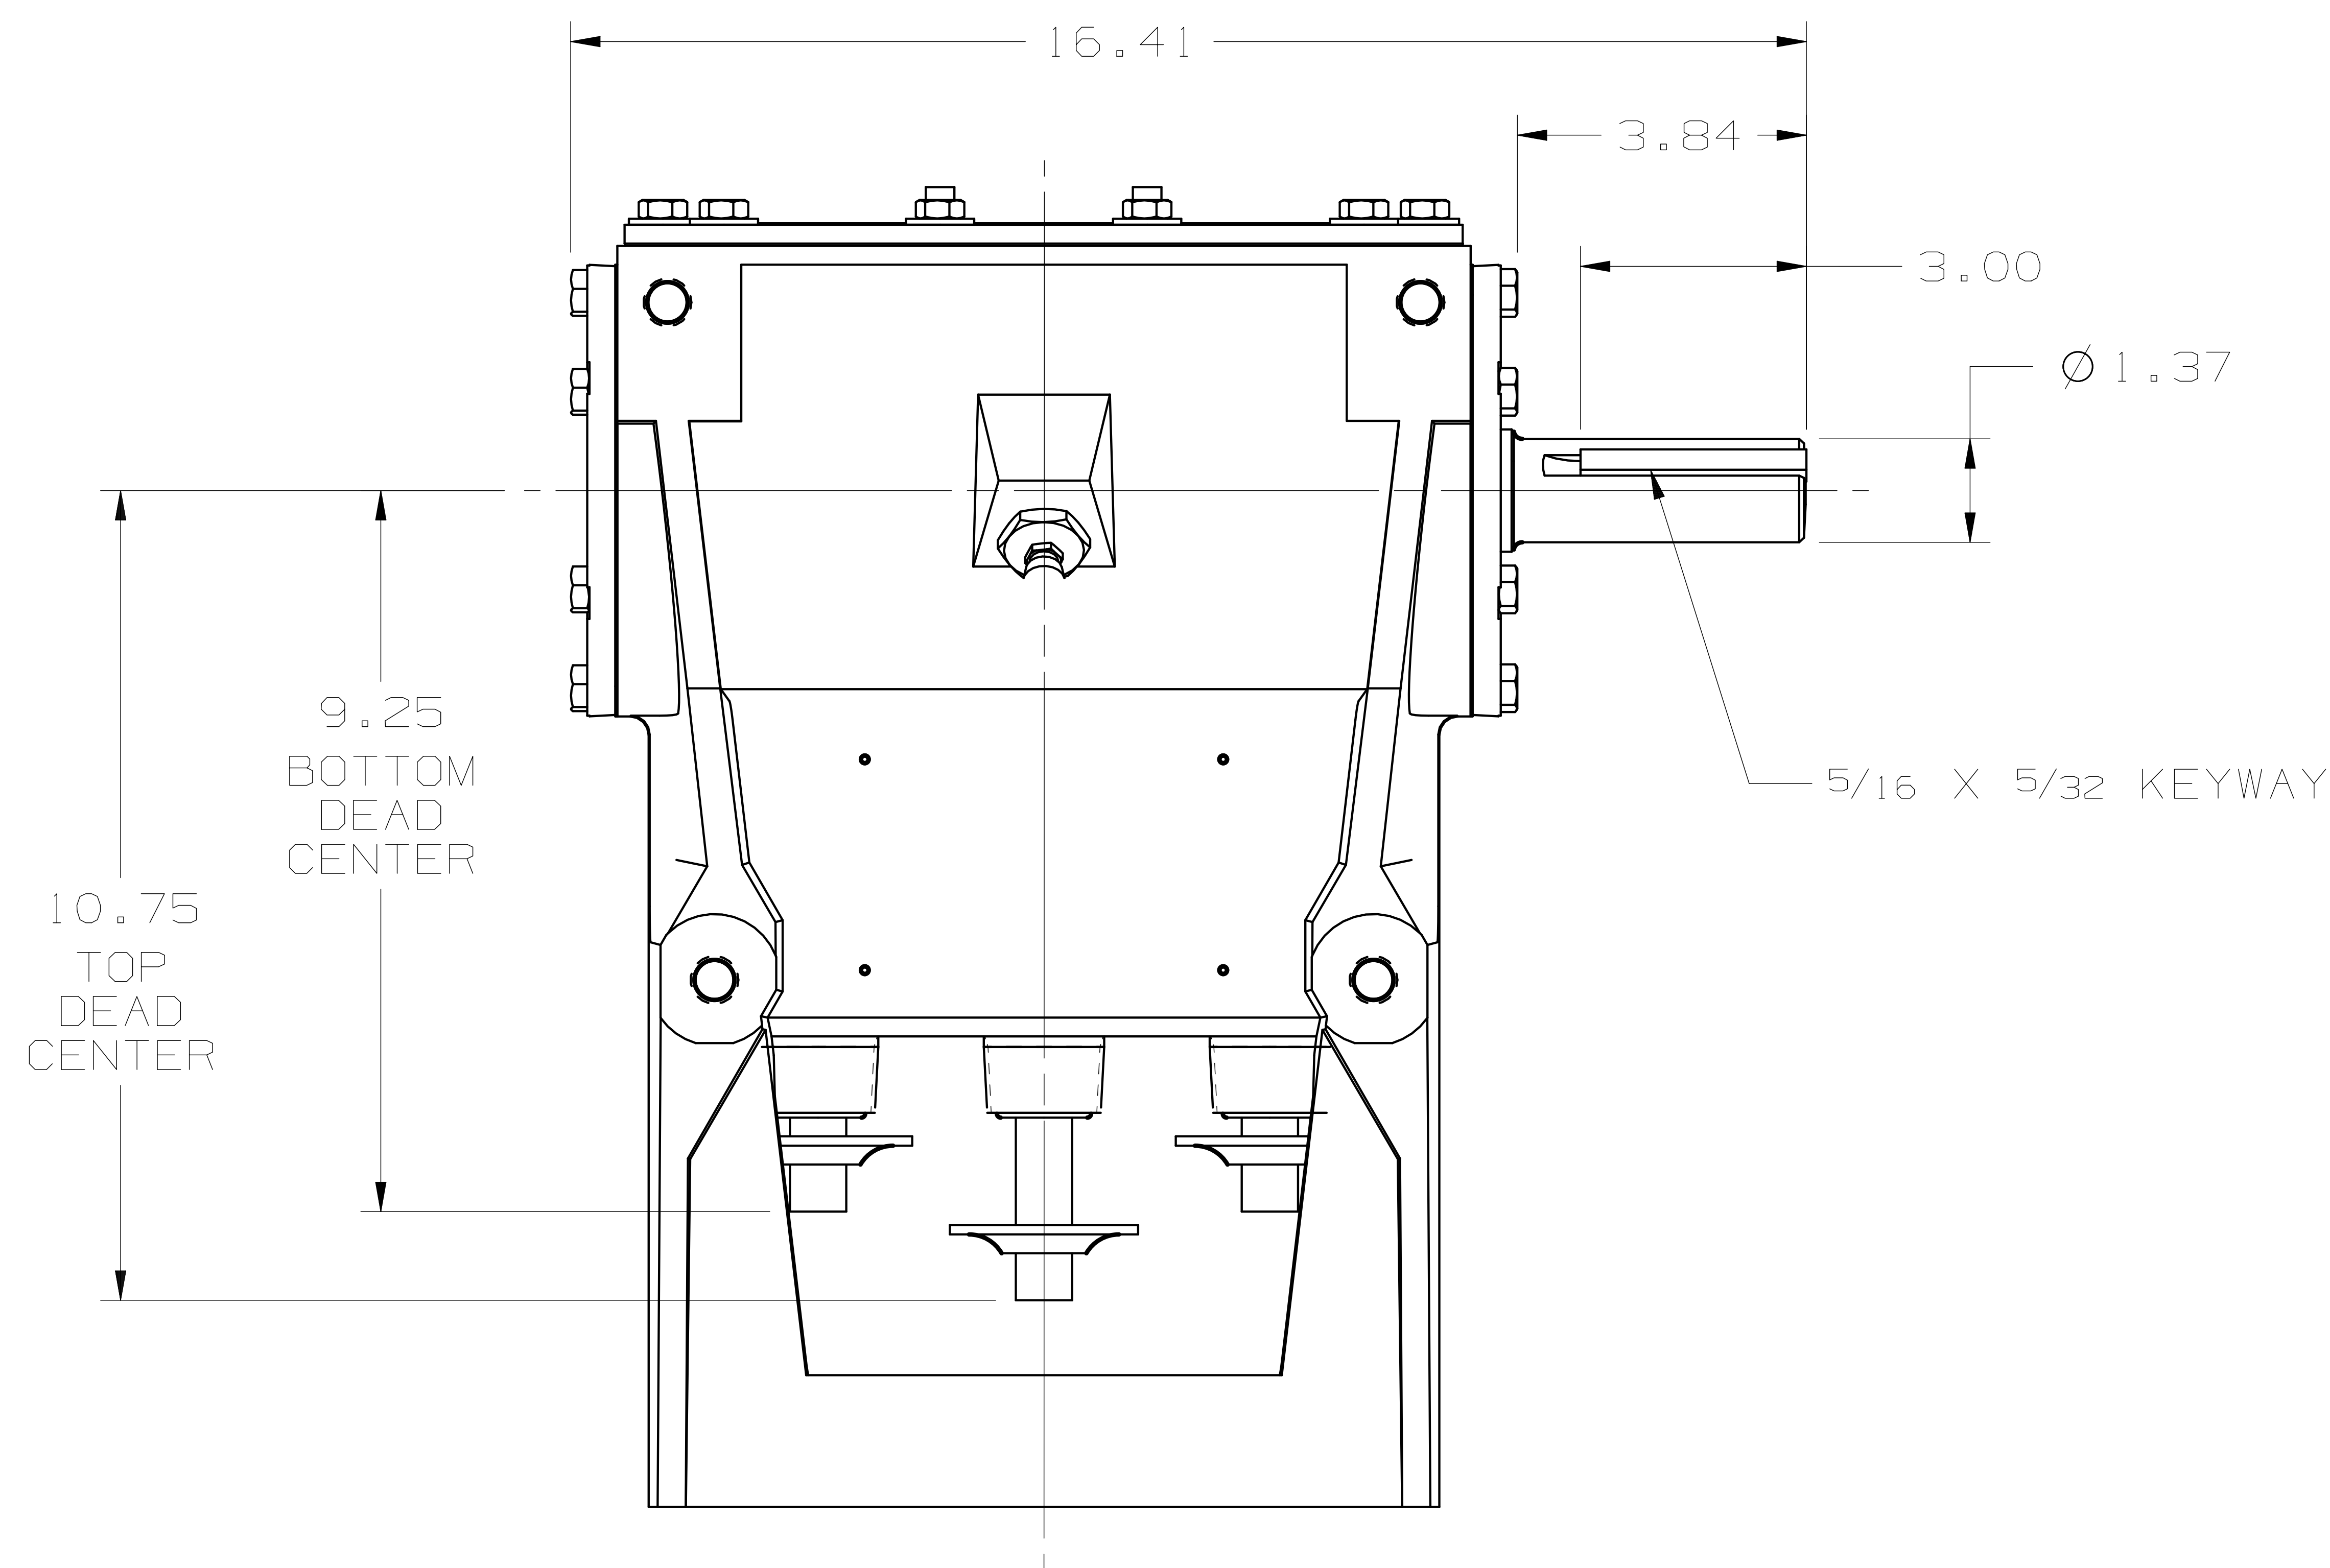

PRIVATE AND CONFIDENTIAL

THIS DOCUMENT AND ALL THE INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL AND EXCLUSIVE PROPERTY OF FMC TECHNOLOGIES AND MAY NOT BE REPRODUCED, USED, DISCLOSED, OR MADE PUBLIC IN ANY MANNER PRIOR TO EXPRESS WRITTEN AUTHORIZATION BY FMC TECHNOLOGIES. THIS DOCUMENT IS ACCEPTED PURSUANT TO AGREEMENT TO THE FOREGOING, AND MUST BE RETURNED UPON DEMAND.

MANUFACTURER AGREES THAT ARTICLES MADE IN ACCORDANCE WITH THIS DOCUMENT SHALL BE CONSIDERED FMC TECHNOLOGIES' DESIGN, AND THAT IDENTICAL ARTICLES OR PARTS THEREOF SHALL NOT BE MANUFACTURED FOR THE USE OR SALE BY MANUFACTURER OR ANY OTHER PERSON OR ENTITY WITHOUT PRIOR EXPRESS WRITTEN AUTHORIZATION BY FMC TECHNOLOGIES.

ENGINEERING DIMENSIONAL OUTLINE

DESCRIPTION
POWER END ASSEMBLY; M06
RH

DRAWN BY:	DATE:
STOREY, BRYAN T.	24-JUL-2003
DRAFTING CHECK:	DATE:
KUNISHIGE, SCOTT	07-AUG-2006
DESIGN REVIEW:	DATE:
SINGLETERRY, RONALD	16-AUG-2006
MANUFACTURING APPROVAL:	DATE:
CRUZ, GEORGE	16-AUG-2006
APPROVED BY:	DATE:
LYON, TIM	17-AUG-2006

FMC Technologies		
LATEST ECN NO.	5016515	REV. B
DRAWING NUMBER		
6700DU5010140		

COPYRIGHT FMC TECHNOLOGIES